


All Pages Of This Edition Approved
Signature: _____ Date: _____



由 Autodesk 教育版产品制作

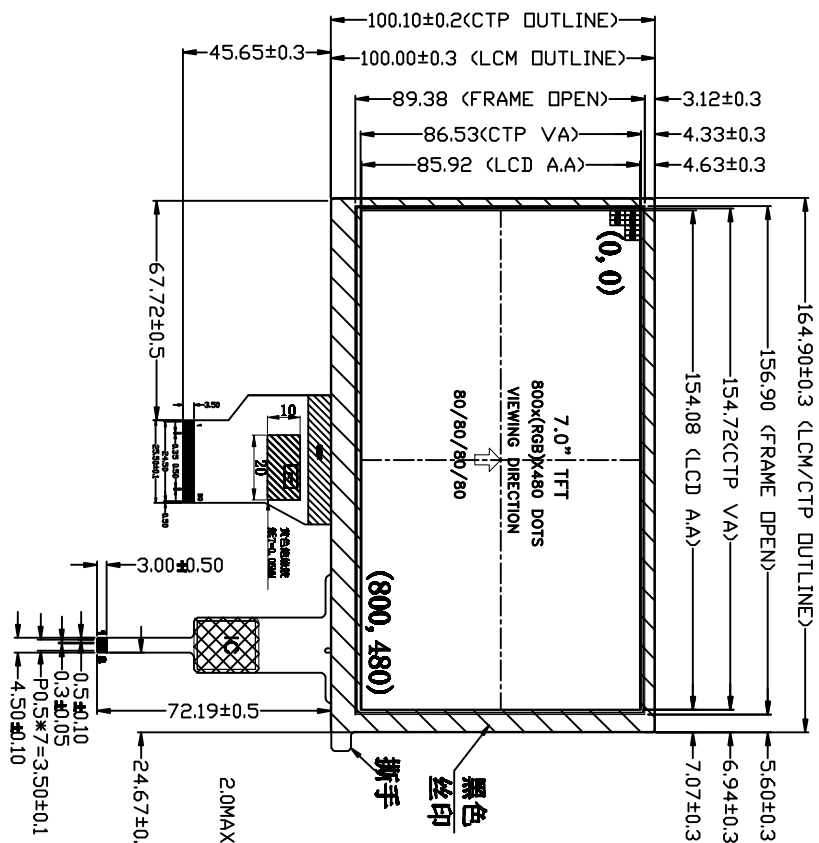


技术参数:

1. 结构G+G: Cover Glass+LOCA+ITO GLASS+FPC,Cover Glass: 1.1mm, LOCA: 0.15mm, 普通 TO Glass: 0.70mm, 总厚度: 1.95±0.15mm;
2. IC型号: HY4633, 5点触摸 通道数: TX21*RX12; 工作电压: 3.3V, 中断方式: 下拉脉冲; FPC 接口线为IC标准接口, IO 电压: 3.3V;
3. 透光率: ≥85%; TP 分辨率: X: 800, Y: 480 储存温度范围: -20℃~+70℃, ≤90%RH;
4. 表面硬度: ≥6H (铅笔硬度测试); 工作温度范围: -30℃~+80℃, ≤90%RH;
5. Cover Glass 材质: 钢化玻璃(旭硝子); 产品符合RoHS标准

NOTES:

1. DISPLAY TYPE: 7.0°TFT
2. VIEWING DIRECTION: 80/80/80/80
3. POLARIZER MODE: TRANSMISSIVE/POSITIVE
4. OPERATING TEMP: -20° C~+70° C
5. STORAGE TEMP: -30° C~+80° C
6. UNMARKER TOLERANCE: ±0.20

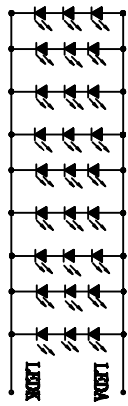

VP=9, 6V (Typ), IP=270ma (Fix)
640dots (MIN) 700dots (Typ)

PIN ASSIGNMENT	PIN ASSIGNMENT		
1	LBD4	26	G1
2	LBD4	27	G0
3	LBD4	28	R7
4	LBD4	29	R6
5	GND	30	R5
6	VCOM	31	R4
7	DYDD	32	R3
8	MODE	33	R2
9	DE	34	R1
10	VS	35	R0
11	HS	36	GND
12	B7	37	DC1X
13	B6	38	GND
14	B5	39	L/R
15	B4	40	U/D
16	B3	41	VCE
17	B2	42	VCL
18	B1	43	AVDD
19	B0	44	RESSET
20	C7	45	NC
21	C6	46	VCOM
22	C5	47	DITFB
23	C4	48	GND
24	C3	49	NC
25	C2	50	NC

PIN	SYMBOL
1	GND
2	GND
3	VDD
4	INT
5	RESSET
6	STL
7	SAD
8	GND

Kingtech Group Co., Ltd.

DESIGNER:	DATE:	MODEL NUMBER:	PROJECT:
CHECKER:		PV070370150N-CT	1 OF 1
APPROVED BY:			