


8 7 6 3 2 1  
已确认此版本的所有图纸

客户签名: 日期:


REV	DESCRIPTION	DATE
1.0	首次设计;	2022-10-29

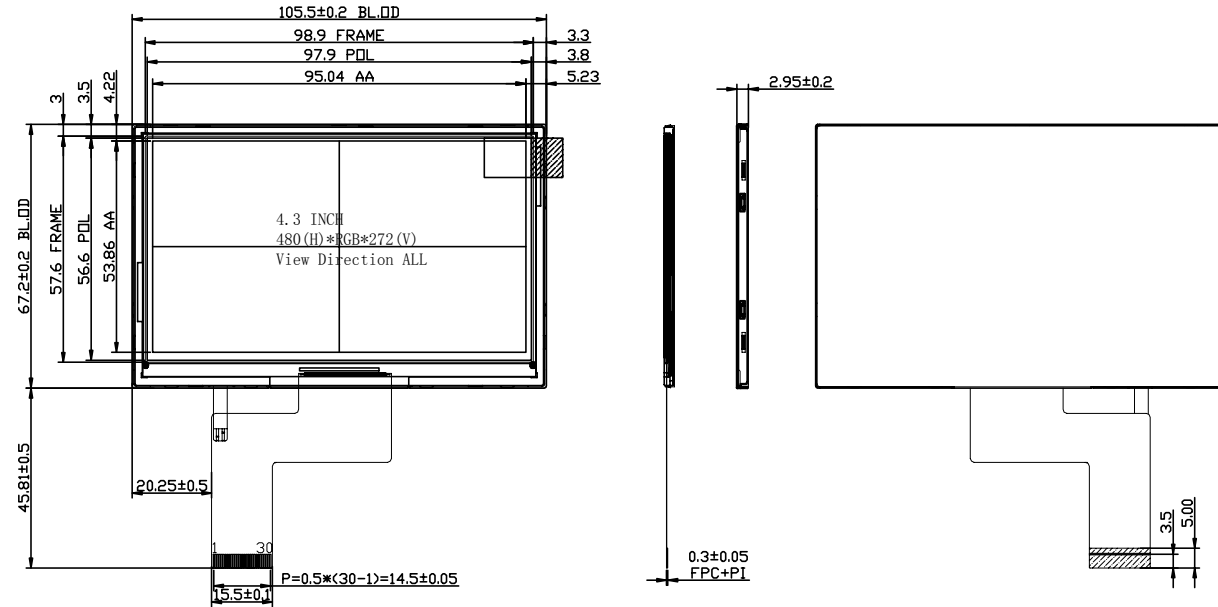

Pin Assignment	
1	VCI
2	IOVCC
3	GND
4	RESET
5	GND
6	CS
7	WRX
8	RDX
9	DCX
10	GND
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	DB8
20	DB9
21	DB10
22	DB11
23	DB12
24	DB13
25	DB14
26	DB15
27	GND
28	TE
29	LEDA
30	LEDK

Notes:

1. Display Mode: 16.7M TFT/Normally Black
2. Viewing Angle: ALL
3. LCD Driver IC: TBD
4. Operating Temp: -20°C ~ +70°C
5. Storage Temp: -30°C ~ +80°C
6. \*: Critical Dimension, ( ): Reference Dimension
7. Undefined Tolerance: ±0.2
8. Surface Luminance: 260 CD/M<sup>2</sup>(TYP)
9. Requirements on Environmental Protection: ROHS



8080 series 16bit (DB0~DB15);  
8080 series 8bit (DB0~DB7; DB8~DB16 is pull low).

Kingtech Group Co., Ltd.	TITLE: ASSEMBLY	DO NOT SCALE THIS DRAWING, GENERAL TOLERANCE: ±0.2		
	PART NO.:	<b>PV043022H0130X</b>		
	DRAWN BY:	DATE:	PROJECTION: OF	
	CHECKED BY:	DATE:	SCALE: N.T.S	UNIT: mm
	APPROVED BY:	DATE:		