


已确认此版本的所有图纸

客户 签名: _____ 日期: _____

REV	DESCRIPTION	DATE
1.0	初次设计	2021-8-19

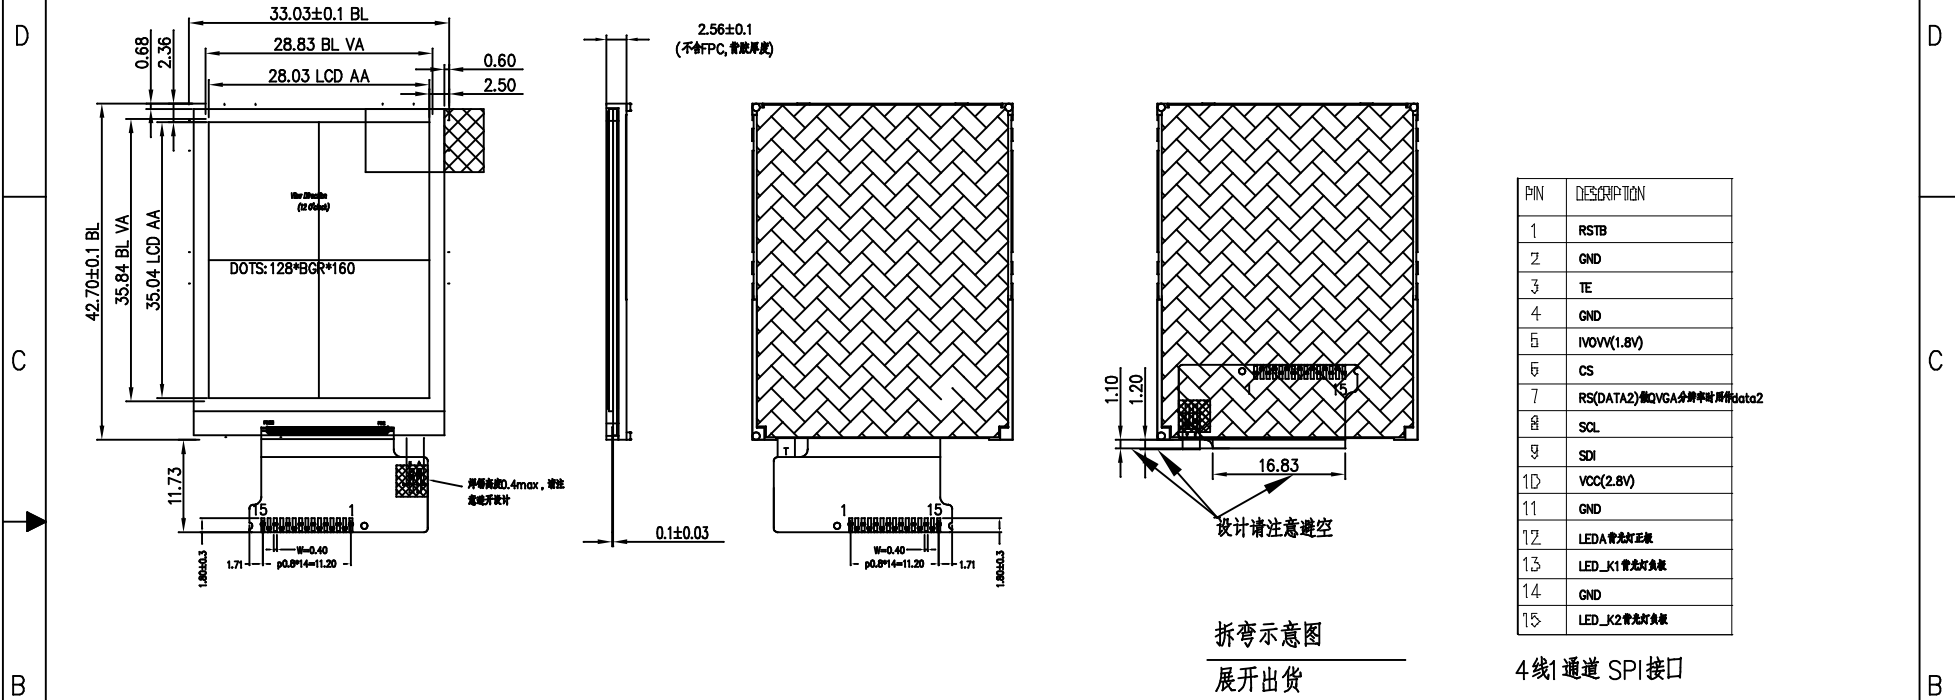


PIN	DESCRIPTION
1	RSTB
2	GND
3	TE
4	GND
5	IVOVV(1.8V)
6	CS
7	RS(DATA2) 数据VGA分频时钟数据data2
8	SCL
9	SDI
10	VCC(2.8V)
11	GND
12	LED A 背光灯正极
13	LED_K1 背光灯负极
14	GND
15	LED_K2 背光灯负极

4线1通道 SPI接口

折弯示意图
展开出货

- NOTES:
1. Display type: TFT1.77"
 2. Viewing direction: 12 O'CLOCK
 3. Drive IC: ST7735S
 4. Backlight color: LED WHITE
 5. Operation temperature: -10~60°C
 6. Storage temperature: -20~70°C
 7. LCM Operating Voltage: Vdd=2.8V
 8. VAmDs: OTHER



TITLE:	ASSEMBLY	DO NOT SCALE THIS DRAWING, GENERAL TOLERANCE: ±0.2	
PART NO.:	PV017707H0115G		
DRAWN BY:		DATE:	
CHECKED BY:		DATE:	
APPROVED BY:		DATE:	
		PROJECTION:	
		SCALE: N.T.S	UNIT: mm
		SHEET: 1 OF 1	